■ DIMENSIONS AND CIRCUITRY

Unit: mm (inch)

Flat Type

ERD 1***S

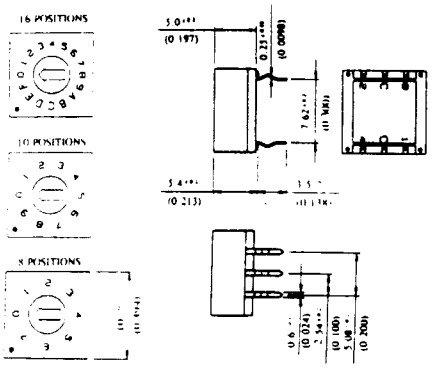

ERD 2***S

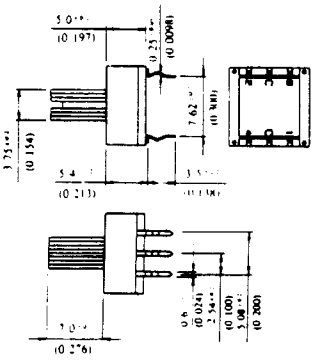

P.C.B LAY OUT (TOP VIEW)

ERD****S



NEW ERD****M



NEW ERD 1***R



NEW ERD 2***R



ERD ****R



(SMT TYPE)

ERD****M



Shaft Type

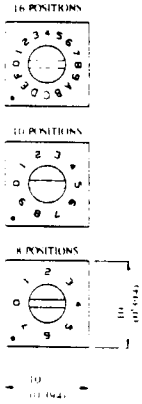

NEW ERD 1***F



NEW ERD 2***F



ERD ****F



■ CONSTRUCTION





■ PART NUMBERING SYSTEM

ERD 110 R S

- S: Setting: *S: Standard type (Top Adjust type)*
  R: Right Angle type with row spacing 2.54mm
  F: Right Angle Type with row spacing 5.08mm
  M: Surface Mounting type with Top Tape Sealed
  D: Surface Mounting type with Top Tape Sealed in Tape & Reel Package
- R: Code: *R: Real*
  C: Complimentary
- 10: Number of Position: *08*
  10
  16
- 1: Rotor: *1: Flat type*
  2: Shaft type
- ERD: Series name: *Rotary Type Sealed Construction*

■ OPTIONS

1. Special marking available.
2. Shaft Cover
   118-80100 (White)
   118-80200 (Red)



3. Tape & Reel Packaging (per EIA STANDARD)

Flat type only



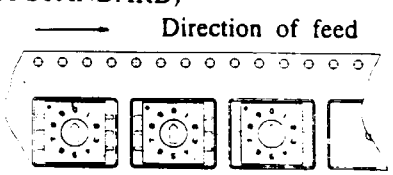

Each Reel contain 750 pcs switches with a 390mm minimum leader and a 160mm minimum trailer